


PFA

Theoretical working pressure at 20°C / Theoretische werkdruk bij 20°C

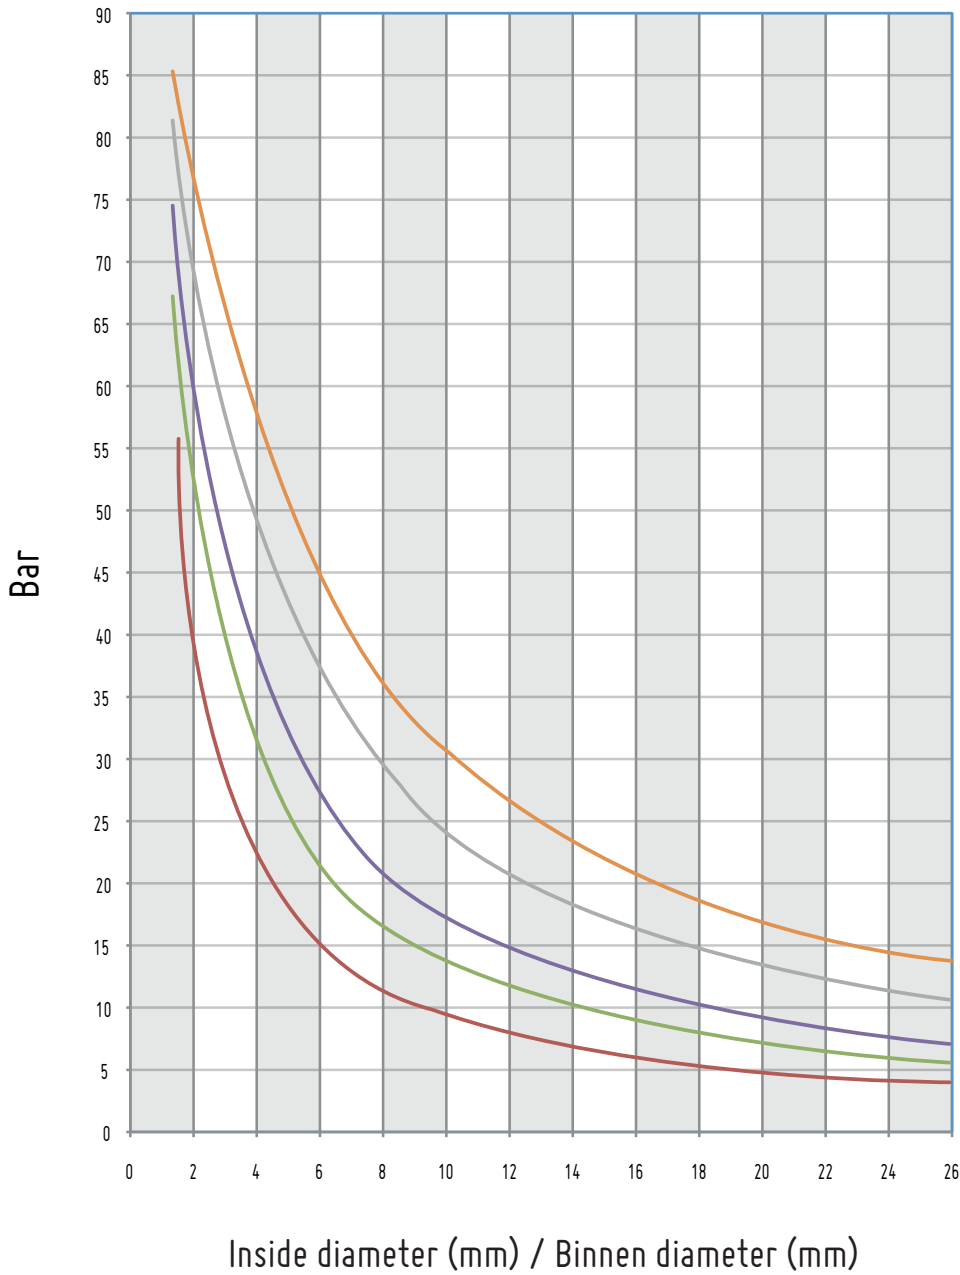

Wall thickness / Wanddikte

- Wall: 0,5
- Wall: 0,75
- Wall: 1,0
- Wall: 1,5
- Wall: 2,0

Burst pressure / Barstdruk = x3

(Safety factor / Veiligheidsfactor)

Temperature °C	50	100	200	250
Reduction Factor	0.84	0.48	0.24	0.19

Actual values may change due to processing method, compound type, extruded dimensions and other variables. It is the user's responsibility to evaluate and fully test the suitability of the product for their specific application.